

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

30 SEP 2004

(43) International Publication Date
16 October 2003 (16.10.2003)

PCT

(10) International Publication Number
WO 03/085003 A1(51) International Patent Classification⁷: C08F 2/00,
14/06, 18/08LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/IT02/00230

(22) International Filing Date: 11 April 2002 (11.04.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: CARLIN, Francesco [IT/IT]; Corte Arco Vala-
resso 3, I-35100 Padova (IT).(74) Agents: PISTOLESI, Roberto et al.; Dragotti & Asso-
ciati SRL, Galleria San Babila, 4/C, I-20122 Milano (IT).(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR THE APPLICATION OF ANTI-FOULING AGENTS

(57) Abstract: There is described a method for applying an aqueous solution to the internal walls of a reactor, before the start of the polymerization reaction of vinyl chloride and/or vinyl acetate, which aqueous solution contains a salt of an anti-scaling agent which comprises a product of condensation of an aldehyde, a phenolic compound and an aromatic carboxylic acid hydroxylated at the aromatic nucleus, wherein the pH-value of this aqueous solution is changed, during the application, to a pH-value of less than 5 and, preferably, in the range between 2.5 and 4.5.

WO 03/085003 A1

Method for the application of anti-fouling agents

The present invention relates to a method for applying anti-scaling agents used in the polymerization of vinyl chloride, vinyl acetate or mixtures thereof.

Prior art

The anti-scaling agents normally used in the polymerization of vinyl chloride and/or vinyl acetate are products which can be obtained by condensation of formaldehyde and 1-naphthol, such as, for example, those described in European patent application EP-52412.

European patent application EP-942936, incorporated herein by reference, describes anti-scaling agents which comprise a product of

condensation of an aldehyde, a phenolic compound and an aromatic carboxylic acid hydroxylated at the aromatic nucleus. Preferably the aldehyde is formaldehyde, the phenolic compound is 1-naphthol and the aromatic carboxylic acid hydroxylated at the aromatic nucleus is selected from salicylic acid, 4-hydroxybenzoic acid, α , β , or γ -resorcylic acid, 2,3-dihydroxybenzoic acid, 2,5-dihydroxybenzoic acid, 2-hydroxy-5-methoxybenzoic acid or 6-hydroxy-2-naphthoic acid; of these, the one greatly preferred is β -resorcylic acid (that is, 2,4-dihydroxybenzoic acid).

Statement of invention

An anti-contaminating agent (or anti-scaling agent), in order to be effective and economically suitable for the production of PVC in suspension (PVC/S), must satisfy the following conditions:

- it must be stable, readily meterable and readily applicable with vapour under pressure (the polymerization reactor must in fact be kept closed in order to

avoid very dangerous contaminations owing to the emission of gaseous vinyl chloride);

- it must have an elevated capacity for coagulating rapidly upon variation in the pH-value at the moment when it comes into contact with the vapour (which is normally at a pH-value of 9-10);

- it must be able to form a coagulum having a gelatinous appearance and, if possible, be colourless (to avoid contaminating the finished product).

The coagulum must preferably be of the "tacky gel" type in order to adhere to the internal walls of the reactors and to form a protective film (coating) owing to the action of the heat of the vapour.

The gel deposited on the walls must further be able to penetrate uniformly into the micropores of the surface of the steel in order to prevent the formation of microparticles of PVC which can give rise to the formation of the deposits.

Furthermore, it must not be necessary to heat the internal walls of the reactor in order to promote the formation of the protective film; such an operation would in fact involve a delay in the production cycle; after the application, the protective film must be, among other things, strong enough to allow washing with water (pH-value 7) for the removal from the reactor of contaminating residues; the total application time must finally be as short as possible and require simple apparatuses which ensure reliable and homogeneous application of the product.

Results of this type are normally achieved by applying, with vapour under pressure, an aqueous solution containing 4-8% by weight anti-contaminating agent, at least 12-18% of which must remain on the internal walls of the reactor in the form of a protective film (such a

method is described, for example, in "Fine Chemicals for PVC/S", Chapter 5, 1999, published by CIRS Spa, incorporated herein by reference); the method in question in fact allows extended and economical application cycles whereas mechanical or gas-operated spray apparatuses are not presently capable of achieving the above-mentioned objectives.

The present invention relates to a novel method for the application of the anti-scaling agent known as EVERCLEAN® 104NS. The preparation of this anti-scaling agent, currently marketed by the owner 3V Sigma Spa, is described in detail in Example 25 of already-mentioned European patent application EP-942936; it refers to a basic aqueous solution having a brown colour and a pH-value of between 11 and 12.4 (normally 11.54) which, as is known in the art, is applied to the internal walls of the reactors for polymerizing vinyl chloride and/or vinyl acetate by spraying in a vapour stream using an apparatus which is similar to that illustrated in Figure 1.

However, this application method allows the desired anti-scaling effect to be achieved only in part. In fact, when operating in such conditions, a coagulum which adheres sufficiently to the internal walls of the reactors, thereby forming the necessary protective film, is not obtained; on the contrary, the great majority of the anti-scaling agent applied in this manner (approximately 99%) is collected unchanged at the bottom of the reactor before the start of the polymerization reaction, thus necessitating further applications. It has now been surprisingly found that, by acidifying before application the solution of EVERCLEAN® 104NS to a pH-value of less than 5 and, preferably, in the range between 2.5 and 4.5, there is obtained coagulation of

the anti-scaling agent which can therefore be applied with greater effectiveness to the walls of the reactor. The problem addressed by the present invention is therefore to provide a method for applying an aqueous solution containing an alkali metal and/or alkaline earth metal salt, preferably a sodium salt, of an anti-scaling agent comprising a product of condensation of an aldehyde, a phenolic compound and an aromatic carboxylic acid hydroxylated at the aromatic nucleus, characterized in that the pH-value of this aqueous solution is changed to a pH-value of less than 5 and, preferably, in the range between 2.5 and 4.5.

Preferably the aldehyde is formaldehyde, the phenolic compound is 1-naphthol and the aromatic carboxylic acid hydroxylated at the aromatic nucleus is 2,4-dihydroxybenzoic acid; the aqueous solution usually contains 4-8% by weight of the alkali metal and/or alkaline earth metal salt of this anti-scaling agent and has a pH-value in the range between 11 and 12.4.

The method according to the present invention provides for contact on the wall (that is, on the internal walls of the polymerization reactor), or in the mixer, between the solution of the anti-scaling agent and a solution of an organic and/or inorganic acid, for example, citric, oxalic, tartaric, hydrochloric, nitric and/or sulphuric acid, which in the presence of vapour ensure a sufficient reduction in the pH-value to allow the coagulation and the formation of the protective film. This aqueous solution preferably contains from 1 to 10% by weight citric acid, preferably 5%.

According to the greatly preferred embodiment of the present invention, the salt of the anti-scaling agent and the aqueous solution of the organic and/or inorganic acid are mixed with each other before being ap-

plied to the internal walls of the polymerization reactor; the mixture of gel and condensate obtained in this manner is applied to the internal walls of the polymerization reactor in a stream of vapour. A suitable apparatus for the application according to the present invention is, for example, illustrated in Figure 2 (wherein the valves are designated using the letter V). The pressure of the vapour is not binding for the purposes of the present invention and can vary according to the type of installation; the pressures normally used are, however, in the range between approximately 2 and 20 bar; the application time is normally in the range between 15 and 45 seconds.

As will be appreciated from the Examples reproduced below, which must not be taken to limit the present invention, the method claimed here has the advantage of providing the anti-scaling agent corresponding to European patent application EP-942936 in the form of a coagulate product. This product can therefore be readily applied to the internal walls of a reactor for polymerizing vinyl chloride and/or vinyl acetate, thereby forming a protective film which adheres to the walls at a rate greater than 12% by weight relative to the quantity loaded. In this manner, it is thus possible adequately to protect the reactor by eliminating almost completely the formation of deposits even after long periods of activity, thereby minimizing the necessity of interrupting the production cycle to allow the installation to be cleaned; the large quantity of anti-scaling agent which remains attached to the wall further allows a reduction in the quantity of anti-scaling agent to be used, with obvious economic advantages.

Examples

Example 1

There was loaded into a reactor, measuring 10 m³ with walls of stainless steel, provided with an application apparatus of the type schematically depicted in Figure 1, 1 kg of an aqueous solution containing 6% by weight sodium salt of the anti-scaling agent which is obtained as described in Example 25 of European patent application EP-942936. The product was sprayed for 30 seconds on the inside of the reactor with vapour at a pressure of 5 atmospheres.

After the application, the condensate was collected at the bottom of the reactor. The condensate was analyzed in order to determine the pH-value and the possible presence of coagulate. The pH-value was 10 and the condensate contained no precipitate gel.

The condensate was further treated once more with hydrochloric acid until a pH-value of 3.8 was reached and there was finally observed a coagulate of dark brown/black appearance which was found to correspond to more than 99% by weight of the anti-scaling agent initially loaded.

Example 2

The procedure described in Example 1 was repeated and the apparatus schematically depicted in Figure 2 was used (wherein 1 litre citric acid at a concentration of 5% by weight was loaded into tank B).

After spraying in the reactor, the condensate was collected and it was observed that the condensate had a pH-value of 3.2 and contained 85% coagulated anti-scaling product (while the remaining 15% was left deposited on the internal walls of the reactor as a protective film).

Examples 3-4

The procedure of Examples 1 and 2 was repeated with similar results when operating with vapour at a pressure of 18 atmospheres.

Examples 5-8

The procedure of Examples 1-4 was repeated with similar results using EVERCLEAN® 104NS, which is commercially available, in place of the product obtained according to Example 25 of European patent application EP-942936.

Claims

1. A method for applying an aqueous solution to the internal walls of a reactor for polymerizing vinyl chloride and/or vinyl acetate, which aqueous solution contains a salt of an anti-scaling agent which comprises a product of condensation of an aldehyde, a phenolic compound and an aromatic carboxylic acid hydroxylated at the aromatic nucleus, the method being characterized in that the pH-value of this aqueous solution is changed to a pH-value of less than 5.
2. A method according to claim 1, characterized in that the pH-value of the aqueous solution is changed to a pH-value in the range between 2.5 and 4.5.
3. A method according to claim 1, characterized in that the salt of the anti-scaling agent is an alkali metal and/or alkaline earth metal salt, preferably sodium.
4. A method according to claims 1 to 3, characterized in that the pH-value is changed to those values by means of acidification with an aqueous solution of an organic and/or inorganic acid.
5. A method according to claim 4, characterized in that the acid is selected from citric, oxalic, tartaric, hydrochloric, nitric and/or sulphuric acid, preferably citric acid.
6. A method according to claims 4 and 5, characterized in that the aqueous solution contains from 1 to 10% by weight citric acid, preferably 5%.
7. A method according to claims 1 to 6, characterized in that the aqueous solution which contains the salt of the anti-scaling agent and the aqueous solution of the organic and/or inorganic acid are mixed with each other before the polymerization reaction.

8. A method according to claim 7, characterized in that the aqueous solution which contains the salt of the anti-scaling agent and the aqueous solution of the organic and/or inorganic acid are mixed with each other before being applied to the internal walls of the polymerization reactor.

9. A method according to claim 8, characterized in that the mixture thereby obtained is applied to the internal walls of the polymerization reactor in a stream of vapour.

10. A method according to claim 9, characterized in that the aqueous solution thereby obtained is applied to the internal walls of the polymerization reactor at a pressure in the range between 2 and 20 bar.

11. A method according to claim 10, characterized in that the aqueous solution thereby obtained is applied to the internal walls of the polymerization reactor for a period of time of from 15 to 45 seconds.

12. A method according to claim 7, characterized in that the aqueous solution which contains the salt of the anti-scaling agent and the aqueous solution of the organic and/or inorganic acid are mixed with each other on the wall.

13. A method according to claim 1, characterized in that the aldehyde is formaldehyde, the phenolic compound is 1-naphthol and the aromatic carboxylic acid hydroxylated at the aromatic nucleus is 2,4-dihydroxybenzoic acid.


14. A method according to claim 1, characterized in that the anti-scaling agent is EVERCLEAN® 104NS.

15. A method according to claim 1, characterized in that the aqueous solution contains 4-8% by weight of the alkali metal and/or alkaline earth metal salt of the anti-scaling agent.

16. A method according to claim 1, characterized in that the aqueous solution has a pH-value in the range between 7 and 12.4.


- 1/2 -

Figure 1

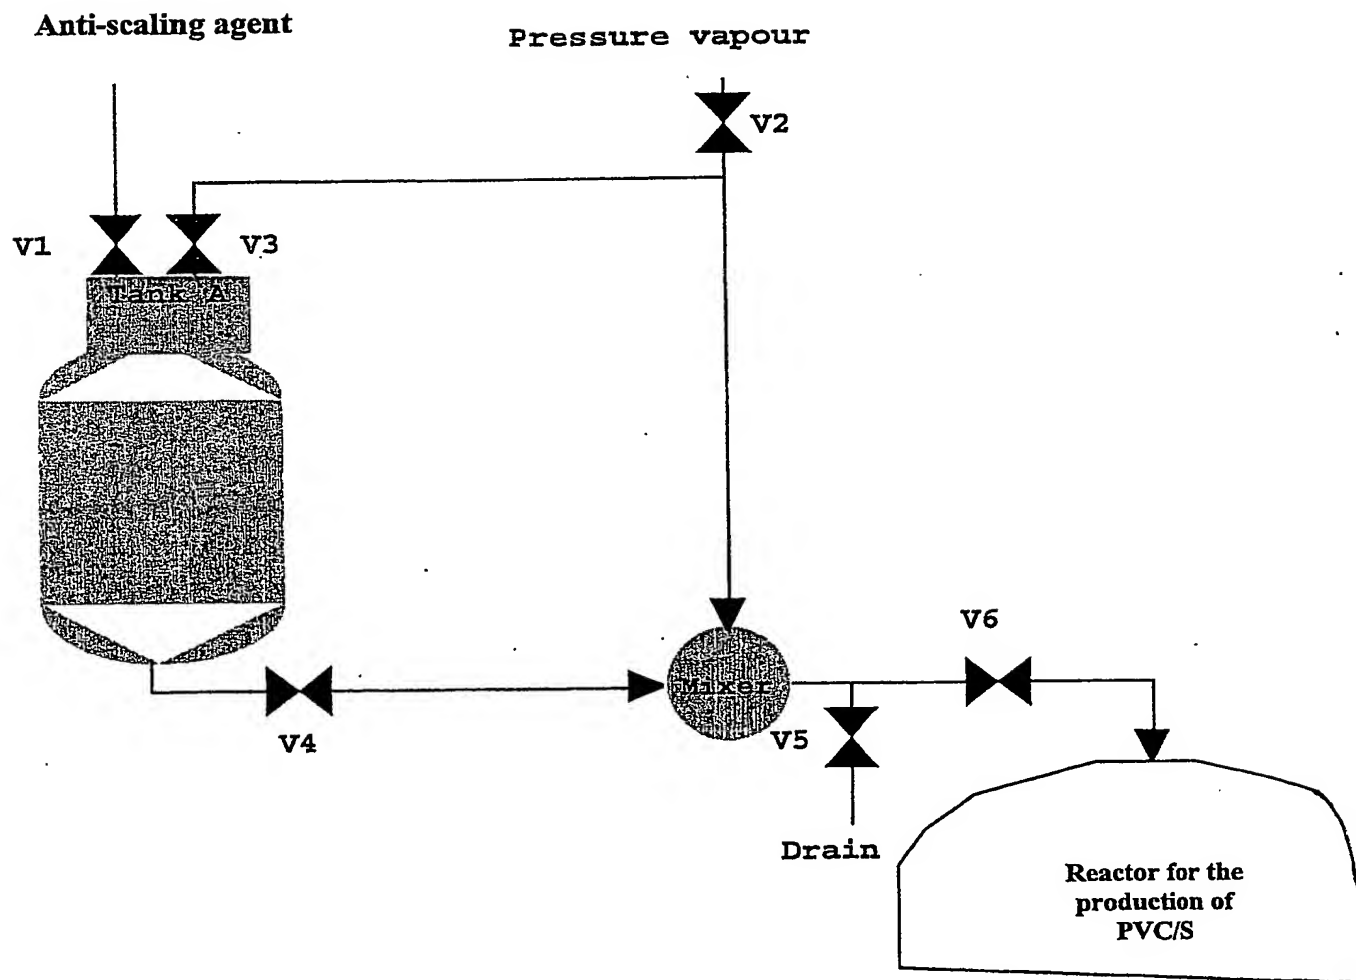

- 2/2 -

Figure 2

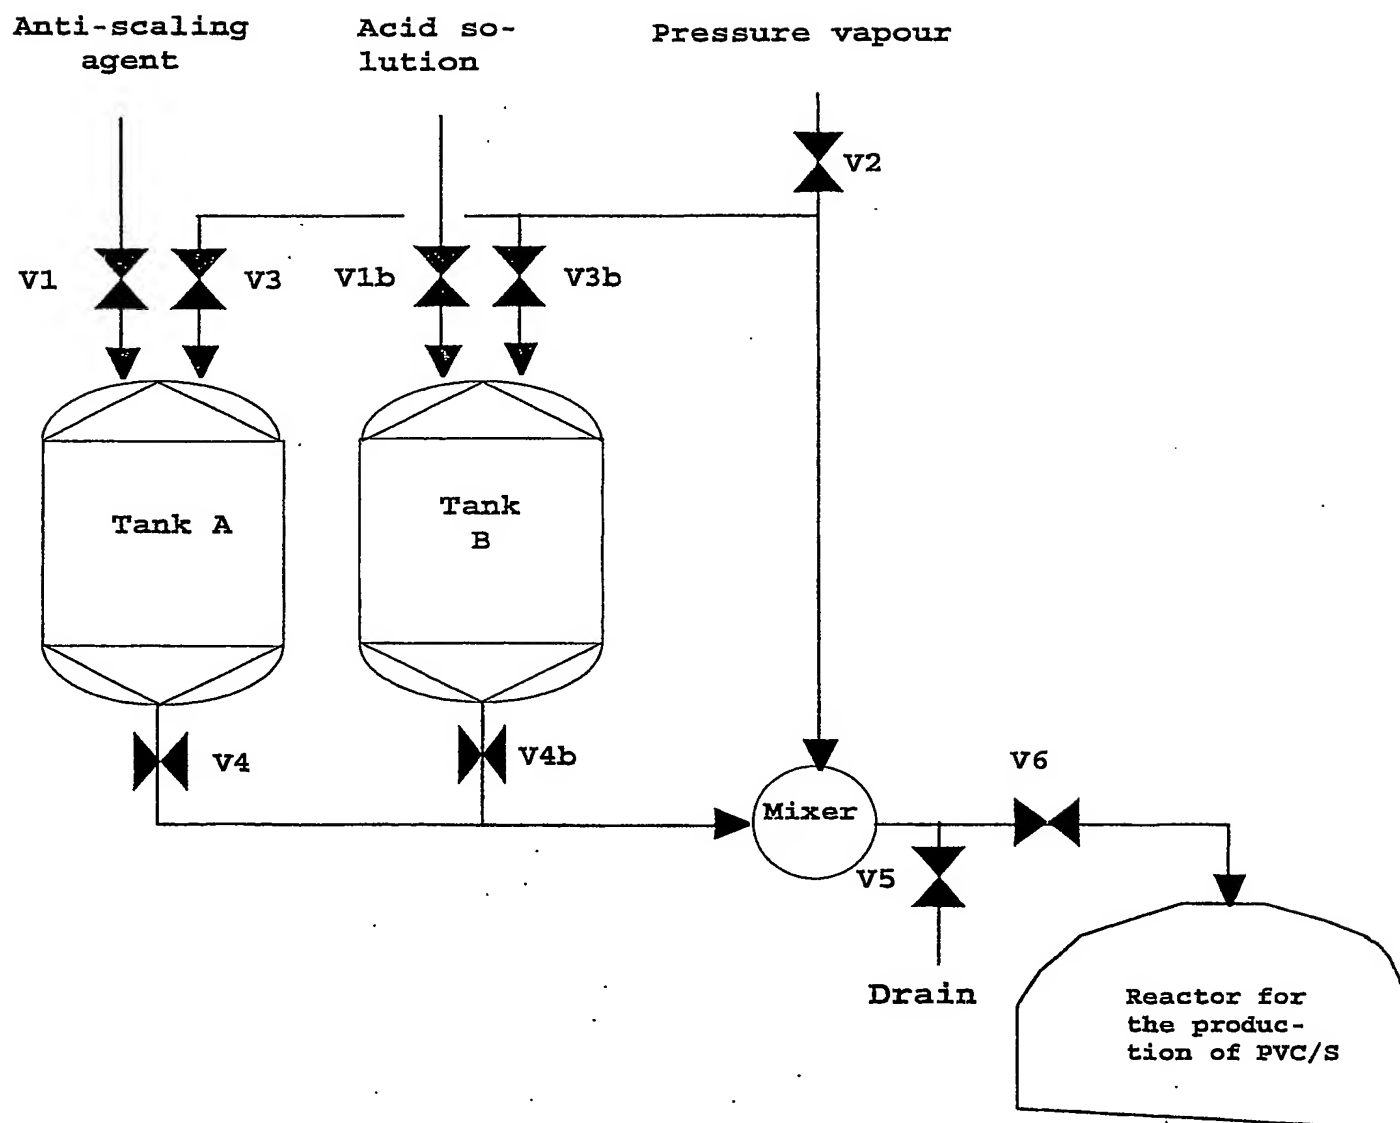

INTERNATIONAL SEARCH REPORT

PCT/IT/00230

A. CLASSEMENT DE L'OBJET DE LA DEMANDE
CIB 7 C08F2/00 C08F14/06 C08F18/08

Selon la classification internationale des brevets (CIB) ou à la fois selon la classification nationale et la CIB

B. DOMAINES SUR LESQUELS LA RECHERCHE A PORTE

Documentation minimale consultée (système de classification suivi des symboles de classement)
CIB 7 C08F

Documentation consultée autre que la documentation minimale dans la mesure où ces documents relèvent des domaines sur lesquels a porté la recherche

Base de données électronique consultée au cours de la recherche internationale (nom de la base de données, et si réalisable, termes de recherche utilisés)
EPO-Internal

C. DOCUMENTS CONSIDERES COMME PERTINENTS

Catégorie *	Identification des documents cités, avec, le cas échéant, l'indication des passages pertinents	no. des revendications visées
A	EP 1 108 727 A (3V SIGMA SPA) 20 juin 2001 (2001-06-20) le document en entier ----	1
A	US 5 674 953 A (MASUKO SEIICHI ET AL) 7 octobre 1997 (1997-10-07) revendication 1 ----	1
A	GB 2 285 447 A (MITSUI TOATSU CHEMICALS) 12 juillet 1995 (1995-07-12) page 19, ligne 24 -page 20, ligne 19 ----	1
A	EP 0 821 008 A (MITSUI TOATSU CHEMICALS) 28 janvier 1998 (1998-01-28) revendications 1,8 -----	1

☐ Voir la suite du cadre C pour la fin de la liste des documents



Les documents de familles de brevets sont indiqués en annexe

*** Catégories spéciales de documents cités:**

- *A* document définissant l'état général de la technique, non considéré comme particulièrement pertinent
- *E* document antérieur, mais publié à la date de dépôt international ou après cette date
- *L* document pouvant jeter un doute sur une revendication de priorité ou cité pour déterminer la date de publication d'une autre citation ou pour une raison spéciale (telle qu'indiquée)
- *O* document se référant à une divulgation orale, à un usage, à une exposition ou tous autres moyens
- *P* document publié avant la date de dépôt international, mais postérieurement à la date de priorité revendiquée

- *T* document ultérieur publié après la date de dépôt international ou la date de priorité et n'appartenant pas à l'état de la technique pertinent, mais cité pour comprendre le principe ou la théorie constituant la base de l'invention
- *X* document particulièrement pertinent; l'invention revendiquée ne peut être considérée comme nouvelle ou comme impliquant une activité inventive par rapport au document considéré isolément
- *Y* document particulièrement pertinent; l'invention revendiquée ne peut être considérée comme impliquant une activité inventive lorsque le document est associé à un ou plusieurs autres documents de même nature, cette combinaison étant évidente pour une personne du métier
- *&* document qui fait partie de la même famille de brevets

Date à laquelle la recherche internationale a été effectivement achevée

16 janvier 2003

Date d'expédition du présent rapport de recherche internationale

27/01/2003

Nom et adresse postale de l'administration chargée de la recherche internationale
Office Européen des Brevets, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Fonctionnaire autorisé

Meulemans, R

INTERNATIONAL SEARCH REPORT

PCT/IT/00230

Document brevet cité au rapport de recherche		Date de publication	Membre(s) de la famille de brevet(s)	Date de publication
EP 1108727	A	20-06-2001	IT MI992621 A1	18-06-2001
			EP 1108727 A1	20-06-2001
			US 2002166992 A1	14-11-2002
US 5674953	A	07-10-1997	CA 2051812 C	29-10-1996
			CA 2086657 A1	29-06-1991
			CA 2086685 A1	29-06-1991
			CA 2086686 A1	29-06-1991
			DE 69032441 D1	30-07-1998
			DE 69032441 T2	24-12-1998
			EP 0462284 A1	27-12-1991
			EP 0821008 A2	28-01-1998
			EP 0821014 A2	28-01-1998
			GR 3027769 T3	30-11-1998
			WO 9109879 A1	11-07-1991
			JP 6062709 B	17-08-1994
			KR 9500298 B1	13-01-1995
			US 6291600 B1	18-09-2001
			US 5728780 A	17-03-1998
			US 5674954 A	07-10-1997
GB 2285447	A	12-07-1995	BR 9405272 A	01-08-1995
			CA 2138182 A1	28-06-1995
			CN 1114323 A	03-01-1996
			CZ 9403311 A3	12-07-1995
			GR 1002007 B	30-10-1995
			JP 7233207 A	05-09-1995
			KR 152132 B1	15-10-1998
			PL 306481 A1	10-07-1995
			SG 46973 A1	20-03-1998
			US 5789499 A	04-08-1998
			ZA 9410329 A	11-09-1995
EP 0821008	A	28-01-1998	EP 0821008 A2	28-01-1998
			EP 0821014 A2	28-01-1998
			CA 2051812 C	29-10-1996
			CA 2086657 A1	29-06-1991
			CA 2086685 A1	29-06-1991
			CA 2086686 A1	29-06-1991
			DE 69032441 D1	30-07-1998
			DE 69032441 T2	24-12-1998
			EP 0462284 A1	27-12-1991
			GR 3027769 T3	30-11-1998
			WO 9109879 A1	11-07-1991
			JP 6062709 B	17-08-1994
			KR 9500298 B1	13-01-1995
			US 6291600 B1	18-09-2001
			US 5674953 A	07-10-1997
			US 5728780 A	17-03-1998
			US 5674954 A	07-10-1997

INTERNATIONAL SEARCH REPORT

PCT/IT/02/00230

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08F2/00 C08F14/06 C08F18/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 108 727 A (3V SIGMA SPA) 20 June 2001 (2001-06-20) the whole document	1
A	US 5 674 953 A (MASUKO SEIICHI ET AL) 7 October 1997 (1997-10-07) claim 1	1
A	GB 2 285 447 A (MITSUI TOATSU CHEMICALS) 12 July 1995 (1995-07-12) page 19, line 24 -page 20, line 19	1
A	EP 0 821 008 A (MITSUI TOATSU CHEMICALS) 28 January 1998 (1998-01-28) claims 1,8	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

16 January 2003

Date of mailing of the international search report

27/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Meulemans, R

INTERNATIONAL SEARCH REPORT

PCT/IT 92/00230

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1108727	A	20-06-2001	IT MI992621 A1	18-06-2001
			EP 1108727 A1	20-06-2001
			US 2002166992 A1	14-11-2002
US 5674953	A	07-10-1997	CA 2051812 C	29-10-1996
			CA 2086657 A1	29-06-1991
			CA 2086685 A1	29-06-1991
			CA 2086686 A1	29-06-1991
			DE 69032441 D1	30-07-1998
			DE 69032441 T2	24-12-1998
			EP 0462284 A1	27-12-1991
			EP 0821008 A2	28-01-1998
			EP 0821014 A2	28-01-1998
			GR 3027769 T3	30-11-1998
			WO 9109879 A1	11-07-1991
			JP 6062709 B	17-08-1994
			KR 9500298 B1	13-01-1995
			US 6291600 B1	18-09-2001
			US 5728780 A	17-03-1998
			US 5674954 A	07-10-1997
GB 2285447	A	12-07-1995	BR 9405272 A	01-08-1995
			CA 2138182 A1	28-06-1995
			CN 1114323 A	03-01-1996
			CZ 9403311 A3	12-07-1995
			GR 1002007 B	30-10-1995
			JP 7233207 A	05-09-1995
			KR 152132 B1	15-10-1998
			PL 306481 A1	10-07-1995
			SG 46973 A1	20-03-1998
			US 5789499 A	04-08-1998
			ZA 9410329 A	11-09-1995
EP 0821008	A	28-01-1998	EP 0821008 A2	28-01-1998
			EP 0821014 A2	28-01-1998
			CA 2051812 C	29-10-1996
			CA 2086657 A1	29-06-1991
			CA 2086685 A1	29-06-1991
			CA 2086686 A1	29-06-1991
			DE 69032441 D1	30-07-1998
			DE 69032441 T2	24-12-1998
			EP 0462284 A1	27-12-1991
			GR 3027769 T3	30-11-1998
			WO 9109879 A1	11-07-1991
			JP 6062709 B	17-08-1994
			KR 9500298 B1	13-01-1995
			US 6291600 B1	18-09-2001
			US 5674953 A	07-10-1997
			US 5728780 A	17-03-1998
			US 5674954 A	07-10-1997

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.